

Articulating videoscope PRO HD - Dual Cam

Ø 6.0mm | 4-way articulation - Double objective

Our articulating video endoscopes PRO HD is a lightweight portable camera with articulation built to meet the needs of modern remote visual inspection.

The PRO HD includes the latest technologies such as Heat sensor - HDMI output - Digital Zoom & large 5.7" LCD Screen.

DUAL CAM


The Pro HD offers a dual camera with high resolution of 450.000 pixels that allows forward and side inspection with the same probe.



Technical data	
Probe diameter	6.0 mm
Working length	1.5-2-3--4-5-6-7m
Articulation	4-way 150°
Sheathing	Tungsten braid 5 layers
Tip length	15mm
Sensor	VGA - 450.000 pixels
Direction of vision	0°&90°
Field of view	120°
Focussing range	5-80mm
Screen	5.7"
Data Port	HDMI, Micro USB
Memory	Micro SD 32 GB
Image recording	640x480 JPEG
Video recording	640x480 MOV
Protection Rate	IP67 (water jet fuel, oils)*
Weight	0.55 kg with battery (without probe)
Working temperatures	-10°C + 60°C
Warranty	1 year
Battery	L.7V detachable (4 hours runtime)

To order

Part No	Description
PM57D-615	VIDEOSCOPE PRO HD-5,7" Ø 6.0mm x 1.5m - 0°&90°
PM57D-620	VIDEOSCOPE PRO HD-5,7" Ø 6.0mm x 2.0m - 0°&90°
PM57D-630	VIDEOSCOPE PRO HD-5,7" Ø 6.0mm x 3.0m - 0°&90°
PM57D-640	VIDEOSCOPE PRO HD-5,7" Ø 6.0mm x 4.0m - 0°&90°
PM57D-660	VIDEOSCOPE PRO HD-5,7" Ø 6.0mm x 6.0m - 0°&90°
PM57D-670	VIDEOSCOPE PRO HD-5,7" Ø 6.0mm x 7.0m - 0°&90°
PM-BAT	Spare battery for PRO HD videoscope
ART-HOL	Articulating arm on swivel (13 to 55 mm)

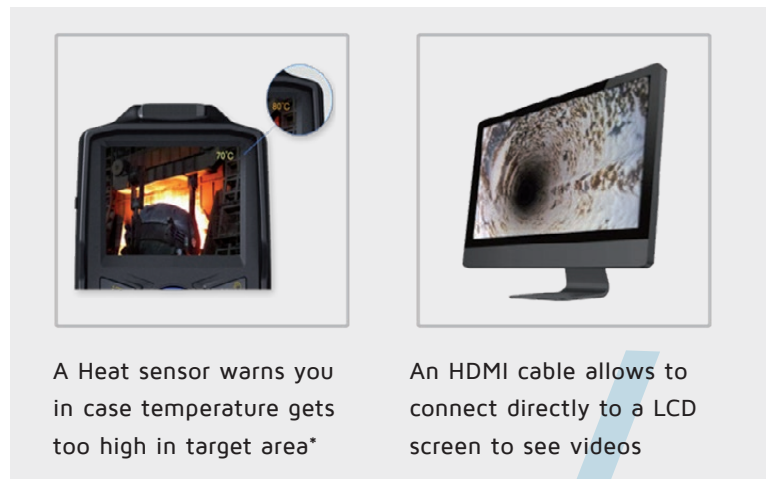

A Heat sensor warns you in case temperature gets too high in target area*

An HDMI cable allows to connect directly to a LCD screen to see videos

What we deliver

- 1 PRO HD videoscope
- 1 universal power supply
- 1 cleaning kit
- 1 USB cable
- 1 HDMI cable
- 1 SD card 32GB
- 1 SD card Reader
- 1 user manual
- 1 carrying case.

